

Gaskets

FLX-USZ...



Description

Gaskets are used for elements of the FLX-REKU cable connections FLX-HDPE to other system components such plenum boxes, female coupling, take-offs, dampers.

FLX-USZ-75 / FLX-USZ-90 - made of EPDM rubber is used for sealing the two ducts and female coupling - provides tightness class C acc. BS EN 12237.

FLX-USP-75 / FLX-USP-90 - made of foam and nozzle is mounted inside the take-offs of plenum boxes and dampers. It is used to seal the box with duct - provides tightness class B acc. BS EN 12237.

FLX-USC-75 / FLX-USC-90 - made of EPDM rubber and is mounted on the ends of the duct FLX-HDPE. It is used to seal the duct with plenum box, damper - provides tightness class C acc. BS EN 12237.

FLX-UST-75 / FLX-UST-90 - seal shrink tubing, used to connect and seal two ducts or duct and plenum box.

Example


Product code: **FLX-USZ - 75**

type
 diameter


<i>kod</i>	<i>d1</i> [mm]	<i>g</i> [mm]
FLX-USZ-75	78	8
FLX-USP-75	75	6
FLX-USC-75	77	3
FLX-UST-75	75	100
FLX-USZ-90	93	8
FLX-USP-90	90	6
FLX-USC-90	92	3
FLX-UST-90	90	100

Dimensions


FLX-USZ-63/FLX-USZ-75/FLX-USZ-90

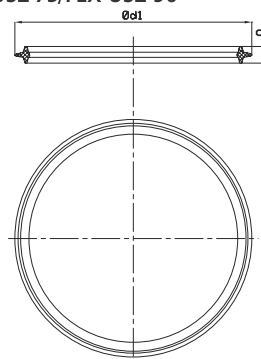

FLX-USP-63/FLX-USP-75/FLX-USP-90



FLX-USC-63/FLX-USC-75/FLX-USC-90

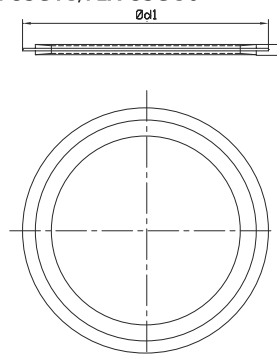

FLX-UST-63/FLX-UST-75/FLX-UST-90

