

Heat recovery ventilation unit with counterflow exchanger **HRU-PremAIR**

Accessories


Filter HRQ-PremAIR-FILT-G4 (standard)



G4 pleated panel filters creates a larger media surface area for air filtration and ensures lower pressure drops. Filters are classified as in the ISO Coarse 70% according to ISO 16890 standards.

Code	Filter class	Dimensions [mm]
HRQ-PremAIR-FILT-G4	G4	423x223x23

Filter HRQ-PremAIR-FILT-F7 (optional)

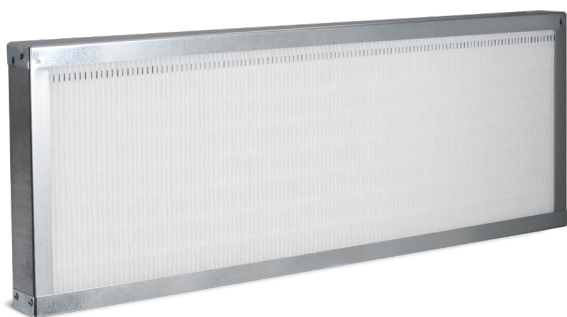

F7 is classified as a fine filter according to EN 779:2012 norm and as ePM₁ 55% in accordance with new standard ISO 16890.

Code	Filter class	Dimensions [mm]
HRQ-PremAir-FILT-F7	F7	423x223x25

Controller HRQ-PremAIR-BUT-LM11 (standard)



Standard (included) wireless 4-button controller allows to choose from 4 operating modes: Away, Home, Timer, Party. Range: 30 m (inside dwelling, 100 m in open space, additional antenna available).

Code	Power supply	Dimensions [mm]
HRQ-PremAIR-BUT-LM11	Battery CR2032	84x84x15

Sterownik HRQ-PremAIR-BUT-LM04 (optional)



Optional wireless 4-button controller allows to choose from 4 operating modes: Away, Home, Timer, Auto. Range: 30 m (inside dwelling, 100 m in open space, additional antenna available).

Code	Power supply	Dimensions [mm]
HRQ-PremAIR-BUT-LM04	Battery CR2032	84x84x15